

# EU2SYS-72 Series

## Heated Display Systems



**EU2SYS-72**  
Front view shown with  
optional casters



• Halo Heat ... a controlled, uniform heat source that gently holds and surrounds food for better appearance, taste, and longer holding life.

• Holds and displays hot food fresh and moist for hours — without adding water.

• Expandable system to meet your specific requirements.

### • ED2 Style Hot Display Case

- Curved glass styling.
- Displays hot food without condensation on glass.
- Protected with a environmentally friendly bumper, made of 93% pre-consumer polycarbonate waste and is 100% recyclable.
- Tempered sliding glass doors reflect heat back into the products and mirror the display to enhance merchandising effect.
- Holds a full range of standard (gastronorm) pan sizes, full-size or half-size sheet pans.
- Standard stainless steel front and black painted end panels.
- Thermostatically controlled heat source radiates from the base of the display case in multiple heat zones.
- Overhead light zones with shatterproof coated bulbs.

### • Decorator Base

- Designed to accommodate your choice of equipment (750-TH-II, 750-S, 500-2D) or optional shelf.
- Stainless steel, distinctively framed in black as standard, and brushed stainless or custom color as alternate choices.

### • Self-Service Hot Display

- Customer self-service opening is available on right side, left side, or across the full length of case.
- Front mounted heat-guard provides customer protection.

The display case is constructed of 18 gauge, non-magnetic stainless steel. A curved, tempered glass front encloses the display case and can be lifted to a 90 degree angle for easy cleaning. Removable, sliding glass doors on the operator side are included. Sliding door tracks have a “clean sweep” cutout allowing for easy cleaning and crumb removal. Framed end clear glass with rubber gasket material protects glass edges from chipping and breakage. The base is divided into two (2) individually managed heat zones with each zone controlled by a separate thermostat with a range of 1 through 10 and heat-on indicator light. Overhead lights are controlled by ON/OFF switches in two (2) light zones. Two (2) 125V plug outlets are available as an option on 120/208-240V units only. Decorator base includes one set of leveling bolts.

☐ **EU2SYS-72\*** - 72" (1829mm) length, ED2-72 with BU2 base

☐ **EU2SYS-72/P\*** - 72" (1829mm) length, ED2-72/P with BU2 base, 71-5/16" (1811mm) self-service opening across full length of case front

☐ **EU2SYS-72/PL\*** - 72" (1829mm) length, ED2-72/PL with BU2 base, 23-3/4" (603mm) self-service opening on left side of case front

☐ **EU2SYS-72/PR\*** - 72" (1829mm) length, ED2-72/PR with BU2 base, 23-3/4" (603mm) self-service opening on right side of case front

\*The system base is not sold as a separate item. Order the full EU2SYS model to receive the base.

### Factory Installed Options

#### • Electrical Choices

- ☐ 120/208-240V
- ☐ 230V
- ☐ 380-415V

☐ Temperature Gauge, optional [GU-33384]

#### • Panel Color Choices

- ☐ Black, standard
- ☐ Stainless Steel, optional
- ☐ Custom Color, optional

☐ Temperature Probe, optional [5004917]

#### • End Glass Choices

- ☐ Clear Glass, standard
- ☐ Solar Bronze Glass, optional [5011353]

☐ Independent Electrical Outlet, optional [5001781]

#### ☐ Low Profile Base, optional


Overall height reduced by 4-3/4" (121mm) [304342]



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

Phone: 262.251.3800 800.558.8744 U.S.A./CANADA Fax: 262.251.7067 800.329.8744 U.S.A. only

www.alto-shaam.com

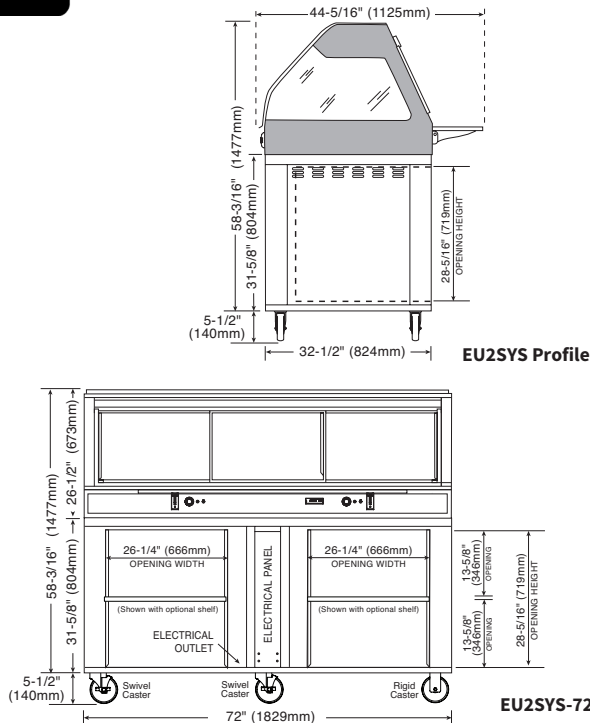

### Dimensions (H X W X D)

#### Exterior, with base:

58-3/16" x 72" x 44-5/16" (1477mm x 1829mm x 1125mm)

#### Well dimensions (W x L x D):

27-3/16" x 69-5/16" x 4-1/2" (690mm x 1760mm x 114mm)

### Electrical

| V           | Ph | Hz    | A    | kW  |                   |
|-------------|----|-------|------|-----|-------------------|
| 120/208-240 | 1  | 50/60 | 18.8 | 4.5 | Bare end, no plug |
| 208         | 1  | 50/60 | 16.3 | 3.4 |                   |
| 240         | 1  | 50/60 | 18.8 | 4.5 |                   |
| 230         | 1  | 50/60 | 18.3 | 4.2 | Bare end, no plug |
| 380-415     | 3  | 50/60 | 9.2  | 4.4 | Bare end, no plug |
| 380         | 3  | 50/60 | 8.0  | 3.3 |                   |
| 415         | 3  | 50/60 | 9.2  | 4.4 |                   |

### Pan Configuration\*

| Pan Size                     | Dimensions                   | Qty. |
|------------------------------|------------------------------|------|
| Full-size & one-third**:     | 12" x 20" x 2-1/2" (GN 1/1)  | 5    |
|                              | 12" x 6" x 2-1/2" (GN 1/3)   | 5    |
| Half-size & one-third**:     | 12" x 10" x 2-1/2" (GN 1/2)  | 10   |
|                              | 12" x 6" x 2-1/2" (GN 1/3)   | 5    |
| Full-size sheet pans:        | 18" x 26" x 1"               | 3    |
| <b>Max. Capacity/Volume:</b> | 80 lbs (36 kg) 50 qts (60 L) |      |

\* Pans are not included with display case.

\*\* Will also accept 4" (100mm) deep pans.

### Installation Requirements

Display case must be installed level. The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.

### Weight(EST.)

| Model           | Net             | Ship            |
|-----------------|-----------------|-----------------|
| EU2SYS-72       | 549 lb (249 kg) | 595 lb (270 kg) |
| EU2SYS-72/P     | 549 lb (249 kg) | 595 lb (270 kg) |
| EU2SYS-72/PL/PR | 549 lb (249 kg) | 595 lb (270 kg) |

### Crated dimensions: L x W x H

45" x 85" x 75" (1143mm x 2159mm x 1905mm)

### Specifications

- Ten (10) overhead lights with two (2) light zones.
- Two (2) base heat zones with two (2) adjustable thermostats with a range of 1 through 10, and two (2) heat-on indicator lights.
- Three (3) tinted, reflective, tempered glass sliding doors on operator side.
- One (1) 10" x 60" (254mm x 1524mm) operator-side work shelf.
- Self-serve model 72/P has a self-serve pan insert 26-7/16" x 69-3/16" x 2" (672mm x 1757mm x 51mm) and includes three (3) Wire Pan Grids.
- Self-serve models 72/PL and 72/PR have a self-serve pan insert 21-5/8" x 26-7/16" x 2" (549mm x 672mm x 51mm) and includes one (1) Wire Pan Grid.

### Accessories

|                                                                          |         |                                                                        |         |
|--------------------------------------------------------------------------|---------|------------------------------------------------------------------------|---------|
| <input type="checkbox"/> <b>Carving Station</b>                          | 5001874 | <input type="checkbox"/> <b>Sheet Pan Divider Bar Package</b>          |         |
| <input type="checkbox"/> <b>Castors, plate</b>                           | 4007    | <input type="checkbox"/> Full-service                                  | 5002803 |
| (Includes 2 - 5" (127mm) rigid and 2 - 5" (127mm), swivel with brake)    |         | <input type="checkbox"/> Self-service left-side or right-side of cases | 5002804 |
| <b>Platform Scale</b> (customer side)                                    |         | <input type="checkbox"/> <b>Shelf, Stainless Steel</b>                 | 5005786 |
| <input type="checkbox"/> <b>Left-hand</b>                                | 5001308 | <input type="checkbox"/> <b>Thermostat Guard Cover Plate</b>           | 5007660 |
| <input type="checkbox"/> <b>Right-hand</b>                               | 5001307 | <input type="checkbox"/> <b>Work Shelf with Gravy Lane</b>             | 5005639 |
| <input type="checkbox"/> <b>Pan Insert, Self-Service 4" (102mm) deep</b> | 1001991 |                                                                        |         |